

HPW-8/10 TOUCH II HEAVY PROFESSIONAL WASHER EXTRACTORS



VERSATILITY

OPL < > COIN
ELECTRIC < > HOT WATER
PUMP < > DRAIN VALVE
SINGLE < > STACKED
Wet cleaning features ready
Suitable for many sectors: restaurants, gyms, campings, mop cleaning, apartments, coin laundries, dry cleaners, nurseries...



OUTSTANDING FEATURES

High G FACTOR of 450.
User-friendly and totally programmable
TOUCH II microprocessor with a 4,3" touch screen
8 dosing signals as standard. 2 water inlets
USB Connection: PC software free of charge for programming, traceability, data analysis...
Traceability as standard
Wet cleaning standard with the Touch II: water levels and speed are modifiable
Remote communication ready
Multi-payable systems
Short washing cycles (Heating Power 6 kW)



EFFICIENCY

Water saving: automatic adjustment of water and chemicals
Optimal loading: manual indication of the loading weight
High G-FACTOR of 450: Reduced residual moisture > reduced drying time



ROBUSTNESS

Outer casing in grey skinplate
Robust aluminium door
AISI-304 stainless steel inner/outer drum and ribs
No inner drum seal (muffle), easy to repair/clean
Industrial house bearing and bearings (Up to 15,000 working hours) and possibility to replace bearings
Same motor and inverter as DOMUS industrial washers DHS
Industrial and heavy duty doorlock



OTHERS


Free standing washers (leveling feet included)
LOADING AID feature: water and rotation control
Detergent dispenser with 4 compartments
Frequency inverter to control imbalances
CE and WRAS approved product.



OPTIONS

- Double drain
- Drain-pump kit
- Silicon gasket
- Reversible door opening
- Tropicalized model: protected board
- Relay card with 6 extra dosing signals: up to 14 signals
- DomusConnect communication Kit
- Normally closed drain valve
- Plinth for better ergonomics
- Plinth for mops, with filter (only valve models)
- Plinth for water recovery (tank included)
- Stainless steel AISI 304 outer casing
- Delayed door opening in case of power outage
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral
- Coin/token kit

TECHNICAL DATA	UNIT.	HPW-8 V		HPW-8 P		HPW-10 V		HPW-10 P	
DRUM									
Load capacity 1:9 / 1:10	Kg	9/8		9/8		11/10		11/10	
Volume	l	80		80		100		100	
Diameter	mm	532		532		532		532	
Depth	mm	360		360		425		425	
GENERAL DETAILS									
Washing speed / Spinning speed	r.p.m.	50/ 1.250		50/ 1.250		50/ 1.250		50/ 1.250	
G Factor	-	450		450		450		450	
Maximum force transmitted	KN	1,47 ± 0,53		1,47 ± 0,53		1,57 ± 0,53		1,57 ± 0,53	
Frequency-dynamic force	Hz	18,33		18,33		18,33		18,33	
Coin laundry version	-	Yes		Yes		Yes		Yes	
Double drain	-	Opt		No		Opt		No	
Noise level	dB	<70		<70		<70		<70	
Weighing / Tilting system	-	No/No		No/No		No/No		No/No	
DOOR									
Height center door / Height base door	mm	537/280		537/280		537/280		537/280	
Diameter	mm	373		373		373		373	
POWER									
Motor	kW	0,75		0,75		0,75		0,75	
Electric heating power	kW	6		6		6		6	
Total electric power (electric model)	kW	6,25		6,25		6,25		6,25	
Total electric power (hot water model)	kW	0,75		0,75		0,75		0,75	
CONNECTIONS		E		HW		E		HW	
Tension 230V I+N+T 50/60Hz	N° x mm2/A	3x6 - 40A	2x1,5+T - 16A	3x6 - 40A	2x1,5+T - 16A	3x6 - 40A	2x1,5+T - 16A	3x6 - 40A	2x1,5+T - 16A
Tension 230V III+T 50/60Hz	N° x mm2/A	4x2,5 - 20A	-	4x2,5 - 20A	-	4x2,5 - 20A	-	4x2,5 - 20A	-
Tension 400V III+N+T 50/60Hz	N° x mm2/A	4x2,5 - 20A	-	4x2,5 - 20A	-	4x2,5 - 20A	-	4x2,5 - 20A	-
Tension 110V I+N+T 50/60Hz	N° x mm2/A		3x2,5+T - 20A		3x2,5+T - 20A		3x2,5+T - 20A		3x2,5+T - 20A
Tension 400 III+T 50/60Hz	N° x mm2/A	4x1,5 - 16A	3x1,5+T - 6A	4x1,5 - 16A	3x1,5+T - 6A	4x1,5 - 16A	3x1,5+T - 6A	4x1,5 - 16A	3x1,5+T - 6A
Water inlet	BSP	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
Drain	BSP	2"		1" (Pump)		2"		1" (Pump)	
DIMENSIONS / PACKING DIMENSIONS									
Width / width	mm	680/710		680/710		680/710		680/710	
Depth / depth	mm	698/832		698/832		742/832		742/832	
Height / height	mm	1.040/1.130		1.040/1.130		1.040/1.130		1.040/1.130	
Net weight / Gross weight	kg	140/150		140/150		150/160		150/160	
Volume	m3	0,67		0,67		0,67		0,67	

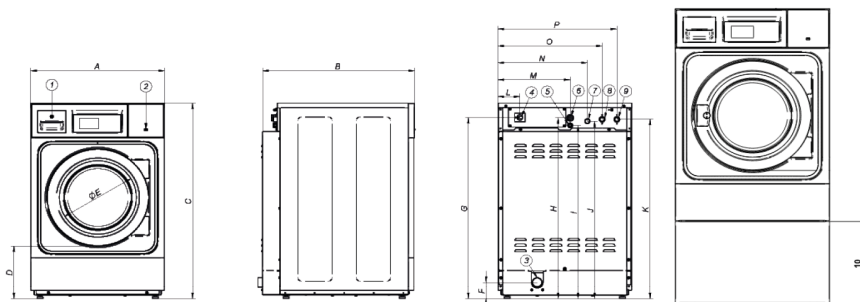

1. SOAP DISPENSER
2. USB PORT
3. DRAIN *
4. MAIN SWITCH
5. ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
6. ELECTRICAL CONNECTION
7. LIQUID SOAP CONNECTION
8. COLD WATER INLET
9. HOT WATER INLET
10. HEIGHT OF PLINTH: 389 MM

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
HPW-8 V	680	698	1040	278	373	86	964	962	922	944	954	110	366	453	528	603	199
HPW-8 P	680	698	1040	278	373	-	964	962	922	944	954	110	366	453	528	603	-
HPW-10 V	680	742	1040	278	373	86	964	962	922	944	954	110	366	453	528	603	199
HPW-10 P	680	742	1040	278	373	-	964	962	922	944	954	110	366	453	528	603	-