DOMUS

WINNING THE FUTURE THROUGH INNOVATION

DLM2-11/18 STACK ESSENTIAL TUMBLE DRYERS

M PROGRAMMER

New M programmer: push buttons to control temperature and time

OUTSTANDING FEATURES

Reversing drum action as standard
Frequency inverter as standard
Galvanized drum as standard

EFFICIENCY

Big fluff filter

VERSATILITY

Make to order - customisation
OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses

ERGONOMICS

Drawer as fluff filter, made of stainless steel
Biggest door diameters

MAINTENANCE

Hinged panel: easy and ergonomic access
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance with M console

OTHERS

Transmission by direct drive
COOL DOWN - anti-wrinkle at the end of the cycle
Heating options: electric, gas
CE approved

OPTIONS

- M Control programming console
- Rear panel external air + filter
- Wooden packing
- Exhaust silencer Ø200
- Ship voltage for electric models: 440V III 50/60 Hz No neutral

TECHNICAL DATA	UNIT.	DLM2-11 STACK ESSENTIAL		DLM2-18 STACK ESSENTIAL	
CAPACITY					
Capacity 1/18	Kg	23		37	
Capacity 1/20	Kg	22		34	
Hourly Output*	Kg/h	36		53	
Evaporation capacity*	l/h	16,5		18,6	
DRUM					
Ø Drum	mm	750		750	
Ø Door	mm	574		574	
Door center height	mm	547/1.522		547/1.522	
Load hole bottom height	mm	260/1.235		260/1.235	
Drum length	mm	475		746	
Drum volume	l	210		330	
POWER					
Drum motor power	Kw	0,37x2		0,37x2	
Fan motor power STACK ESSENTIAL	Kw	0,25x2		0,25x2	
Electric heating power ALL RANGES	Kw	12x2		12x2	
Total electric power (elec.model) STACK ESSENTIAL	Kw	25,34		25,34	
Gas heating power ALL RANGES	Kw	12x2		12x2	
Total electric power (gas model) STACK ESSENTIAL	Kw	1,34		1,34	
CONNECTIONS		ELECTRICAL	GAS	ELECTRICAL	GAS
Tension 230V - I + N + T	N° x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	N° x mm2 / A	4 x 25 / 80A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A
Tension 400V - III + N + T	N° x mm2 / A	5 x 10 / 40A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A
DIMENSIONS / PACKING DIMENSIONS					
Net width / Gross width	mm	785/865		785/865	
Net Depth / Gross Depth	mm	972/1.055		1.242 /1.325	
Net Height / Gross Height	mm	1.980/2.126		1.980/2.126	
Net weight / Gross weight	Kg	260/268		290/303	
OTHERS					
Max airflow	m3/h	1000		1000	
Ø Fume exhaust	mm	200		200	
Sound level	dB	64		64	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

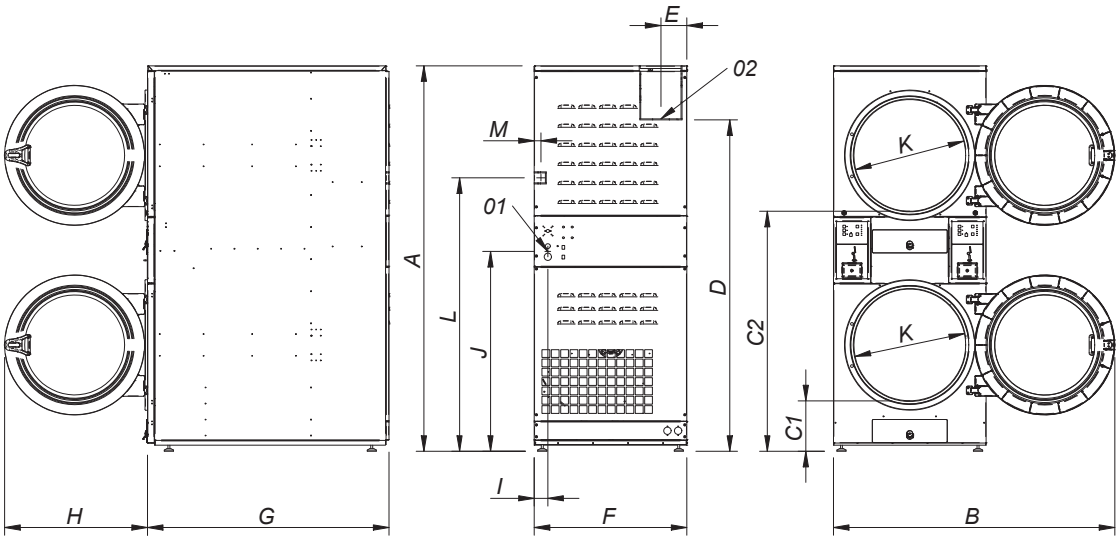

01 ELECTRIC CONNECTION
02 FUMES OUTLET Ø200

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M
DLM2-11	1980	1447	259	1234	1620	135	785	972	735	64	1031	575	1406	35
DLM2-18	1980	1447	259	1234	1620	135	785	1242	735	64	1031	575	1406	35