

DTM2-11/18 STACK COMFORT TUMBLE DRYERS



M PROGRAMMER

New M programmer: push buttons to control temperature and time



OUTSTANDING FEATURES

Reversing drum action as standard
Stainless steel drum as standard
Frequency inverter as standard



EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow
Big fluff filter



VERSATILITY

Make to order - customisation
OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses



ERGONOMICS

Drawer as fluff filter, made of stainless steel
Biggest door diameters



MAINTENANCE

Hinged panel: easy and ergonomic access
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance with M console



OTHERS

Grey skinplate outer casing, stainless steel look
Transmission by direct drive
SFEX - Integrated Fire Extinguishing System
SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle
Heating options: electric, gas
CE approved




OPTIONS

- New M Control with display
- M Control programming console
- Double doorglass
- Rear panel external air + filter
- Wooden packing
- Exhaust silencer Ø200
- Ship voltage for electric models: 440V III 50/60 Hz No neutral

TECHNICAL DATA		UNIT.	DTM2-11		DTM2-18		DTM2-18 G TURBO
CAPACITY							
Capacity 1/18	Kg	23	37		37		
Capacity 1/20	Kg	22	34		34		
Hourly Output*	Kg/h	36	53		76		
Evaporation capacity*	l/h	16,5	18,6		38		
DRUM							
Ø Drum	mm	750	750		750		
Ø Door	mm	574	574		574		
Door center height	mm	547/1.522	547/1.522		547/1.522		
Load hole bottom height	mm	260/1.235	260/1.235		260/1235		
Drum length	mm	475	746		746		
Drum volume	l	210	330		330		
POWER							
Drum motor power	Kw	0,37x2	0,37x2		0,37x2		
Fan motor power STACK DYNAMIC	Kw	0,25x2	0,25x2		0,55x2		
Electric heating power ALL RANGES	Kw	12x2	12x2		-		
Total electric power (elec.model) STACK DYNAMIC	Kw	25,34	25,34		-		
Gas heating power ALL RANGES	Kw	12x2	12x2		24x2		
Total electric power (gas model) STACK DYNAMIC	Kw	1,34	1,34		1,94		
CONNECTIONS		ELECTRIC.	GAS	ELECTRIC.	GAS	GAS	
Tension 230V - I + N + T	Nº x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A	3 x 1,5 / 20A	
Tension 230V - III + T	Nº x mm2 / A	4 x 25 / 80A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A	3 x 1,5 / 20A	
Tension 400V - III + N + T	Nº x mm2 / A	5 x 10 / 40A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A	3 x 1,5 / 20A	
DIMENSIONS / PACKING DIMENSIONS							
Net width / Gross width	mm	785/865	785/865		785/865		
Net Depth / Gross Depth	mm	972/1.055	1.242 /1.325		-		
Net Height / Gross Height	mm	1.980/2.126	1.980/2.126		1980/2126		
Net weight / Gross weight	Kg	260/268	290/303		-		
OTHERS							
Max airflow	m3/h	1000	1000		1500		
Ø Fume exhaust	mm	200	200		200x2		
Sound level	dB	64	64		64		

* It may vary depending on the type of heating, filter cleanliness or extraction type.

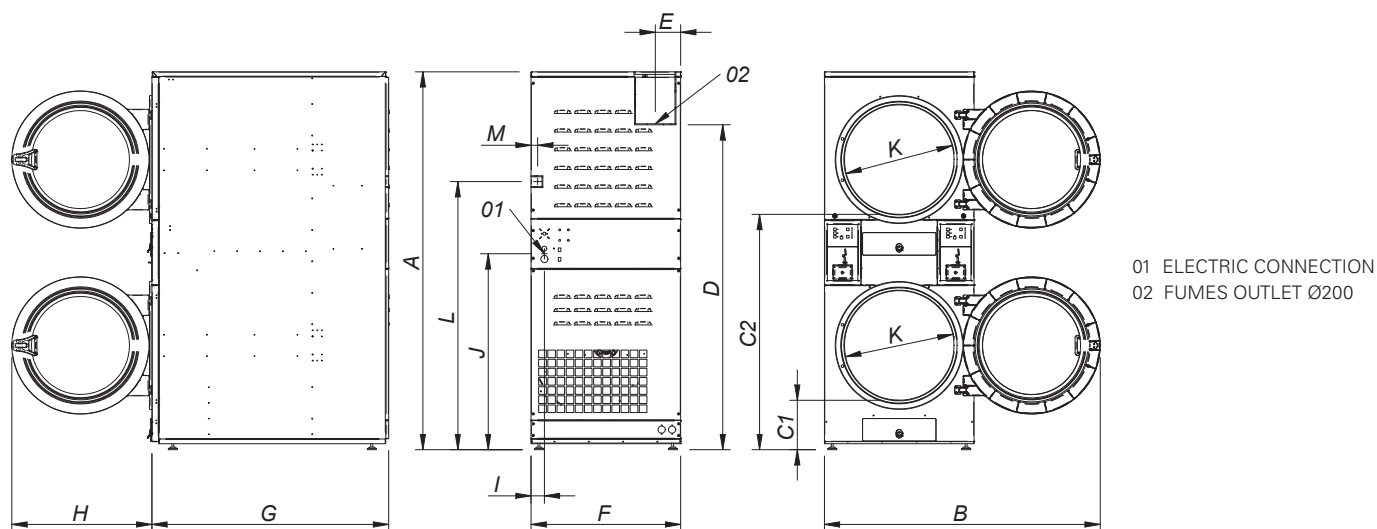

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M
DTM2-11	1980	1447	259	1234	1620	135	785	972	735	64	1031	575	1406	35
DTM2-18	1980	1447	259	1234	1620	135	785	1242	735	64	1031	575	1406	35