

DTT-11/18/23 HEAT PUMP DYNAMIC TUMBLE DRYERS



TOUCH II

User friendly and totally programmable 4,3" Touch II
USB Connection. PC software free of charge for
programming, traceability, data analysis...
Videos on display (ads, instructions, etc.)
37 languages



OUTSTANDING FEATURES

Reversing drum action as standard
Stainless steel drum as standard
Frequency inverter as standard



EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow
Big fluff filter



VERSATILITY

Make to order - customisation
WET CLEANING
OPL > Multivending - Standard OPL model easily
trasformable to coin laundry uses



CONNECTIVITY

Remote technical service
Managemnt of laundries: OPL and COIN
Remote payment



ERGONOMICS

Drawer as fluff filter, made of stainless steel
Biggest door diameters
Opening sense of door adjustable on site



MAINTENANCE

Hinged panel: easy and ergonomic access
Technical menu: statistics, alarm, autotest, data
recovery for technicians and maintenance



OTHERS

Grey skinplate outer casing, stainless steel look
Transmission by direct drive
SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle
No need of exhaust to the exterior
Low energy consumption
Water to refrigerate, which may be reused to wash
CE approved



OPTIONS


- EFFICIENT DRY - Intelligent humidity control
- Double door glass
- Reverse door opening
- SFEX - Integrated Fire Extinguishing System
- New dosing/vaporizing system
- Printer kit
- DomusConnect communication kit
- Rear panel external air + filter
- Stainless steel AISI 304 outercasing
- Stainless steel AISI 304 frontal panel
- Wooden packing
- Ship voltage: 440V III 50/60 Hz No neutral

TECHNICAL DATA	UNIT.	DTT-11 HP DYN	DTT-18 HP DYN	DTT-23 HP DYN
CAPACITY				
Capacity 1/20	Kg	11	17	23
Capacity 1/30	Kg	7	11	15
Hourly Output*	Kg/h	9,8	12,2	13,6
Evaporation capacity*	l/h	5,0	6,3	6,88
DRUM				
Ø Drum	mm	750	750	855
Drum length	mm	475	746	800
Drum volume	l	210	330	460
Ø Loading door	mm	574	574	574
POWER				
Drum motor power	kW	0,37	0,37	0,37
Fan motor power	kW	0,55	0,55	0,55
Electric heating power ALL RANGES	kW	3,8 + 4,0 ***	3,8 + 4,0 ***	3,8 + 4,0 ***
Total electric power (elec.model) HP DYNAMIC	kW	4,77	4,77	4,77
Energetic consumption	** kWh/ l	0,82	0,71	0,61
Nominal airflow	m3/h	1.200	1.200	1.200
CONNECTIONS		ELECTRICAL	ELECTRICAL	ELECTRICAL
Tension 400V - III + N + T (50 Hz)	Nº x mm2 / A	5 x 4 / 20	5 x 4 / 20	5 x 4 / 20
Heat pump inlet (Cooling)	BSP	1/2 "	1/2 "	1/2 "
Heat pump outlet (Cooling)	BSP	1/2 "	1/2 "	1/2 "
Drain	BSP	3/4 "	3/4 "	3/4 "
DIMENSIONS / PACKING DIMENSIONS				
Net width / Gross width	mm	785 / 865	785 / 865	890/970
Net Depth / Gross Depth	mm	1.255/ 1.380	1.525 / 1.650	1.595/1.720
Net Height / Gross Height	mm	1.694 / 1.840	1.694 / 1.840	1.812 / 1.940
Net weight / Gross weight	Kg	342 / 356	357/ 372	380/395
OTHERS				
Sound level	dB	64	64	64

* It may vary depending on the type of heating, filter cleanliness or extraction type

** kWh per litre of evaporated water

*** Compressor + resistances

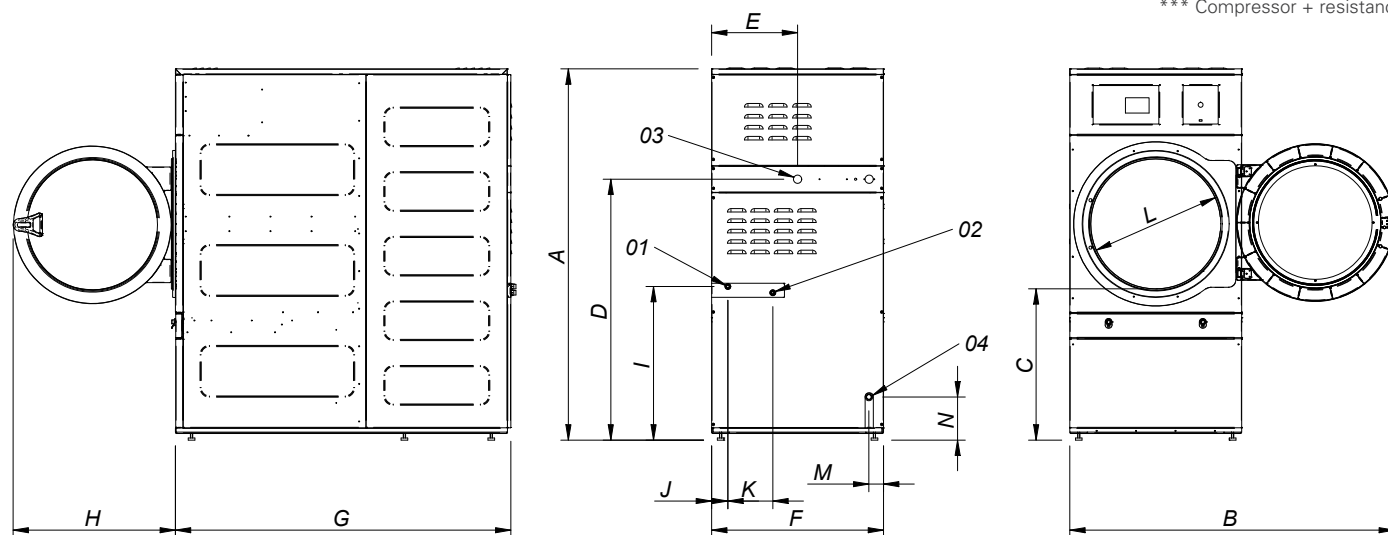

- 01 REFRIGERATION WATER INLET 1/2"
- 02 REFRIGERATION WATER OUTLET (HOT) 1/2"
- 03 ELECTRIC CONNECTION
- 04 DRAIN 3/4"

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
DTT-11 HP	1694	1447	689	1190	392	785	1255	735	700	75	205	575	67	197
DTT-18 HP	1694	1447	689	1190	392	785	1525	735	700	75	205	575	67	197
DTT-23 HP	1812	1552	743	1190	445	890	1595	735	700	127	205	575	119	250